


Polyamide Fire Retardent Toughened Conduit. (RDSO Approved)

- **Raw material** : Polyamide 6 toughened
- **Ingress protection** : IP 68 with ends properly sealed or in combination with suitable glands.
- **Resistant** : Most chemicals & alkalies, good weathering properties
UV stabilised conduits available upon request on MOQ basis.
- **Temperature range** : -15°C TO 115°C
- **FR rating** : UL94 V0 (960°C wire)
- **Certification / Approval** : RoHS, REACH, RDSO PE SPEC AC 0138-2009 Rev 2 , IEC 61386-1 /61386-23
- **Colour** : Black Ral 9005

Flucon NW series conduits are suitable for use in railways coach building and are RDSO approved.

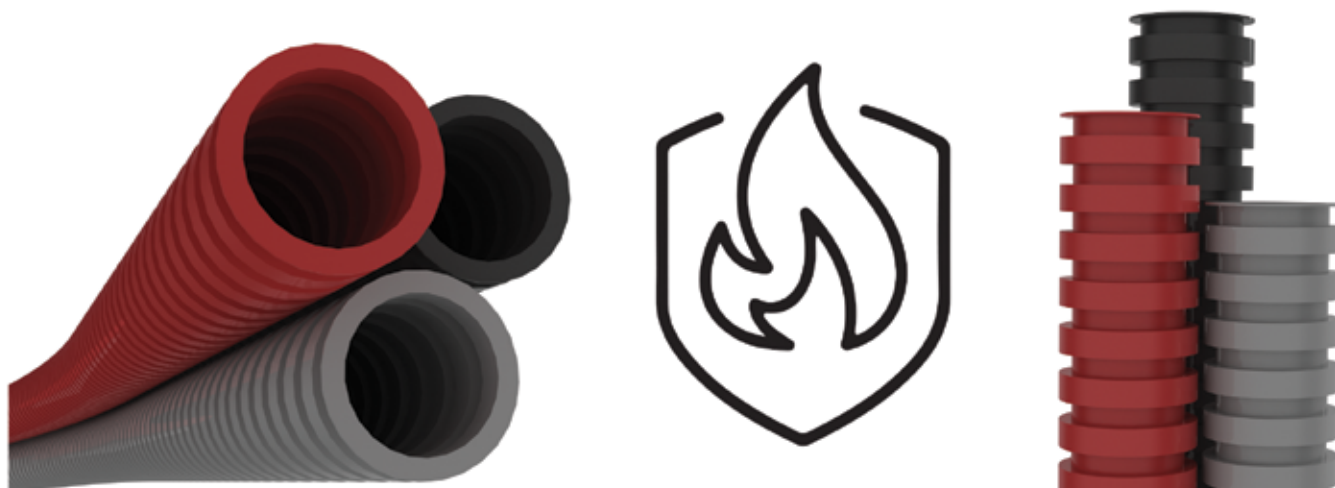

Part Code	Part Description	Dimensions ID	OD	Bending Radius	Quantity Per Roll	Rolls per Master Bags	Master Bag Quantity	MRP Per Meter
		mm	mm		meter	rolls	meters	Rs.
FCFGNCP045	FCNW-10	9.60	13.00	20.00	50	10	500	90.00
FCFGNCP039	FCNW-12	12.00	15.80	30.00	50	10	500	117.00
FCFGNCP040	FCNW-17	16.20	21.20	40.00	50	6	300	163.00
FCFGNCP041	FCNW-23	22.60	28.50	42.00	50	4	200	234.00
FCFGNCP042	FCNW-29	29.00	34.50	55.00	50	3	150	281.00
FCFGNCP043	FCNW-36	36.50	42.50	62.00	25	3	75	340.00
FCFGNCP044	FCNW-48	47.50	54.50	72.00	25	2	50	485.00