

Nylon Tips

Nylon tips are made from specially formulated nylon 6 for long life and usage without chipping or cracking.

We provide tips and handles separately, to replace worn out or broken parts which can be easily fitted without any carpenter tools or specialist for fitting.



Part Code	Part Description	Size		MRP Per Pcs Single Tips
		mm	inch	Rs.
FCSFGNBH0001	FCSHB-01	25	1"	40 .00
FCSFGNBH0002	FCSHB-02	32	1 1/4"	50 .00
FCSFGNBH0003	FCSHB-03	38	1 1/2"	70 .00
FCSFGNBH0004	FCSHB-04	45	1 3/4"	95 .00
FCSFGNBH0005	FCSHB-05	50	2"	130.00

Wooden Handles & Wedges

Flu-Con wooden handles are supplied as spares and can be easily fitted to the old metal heads for refurbishing the soft blow hammers.



Part Code	Part Description	Size		MRP Per Pcs
		mm	inch	Rs.
FCRMHW00286	FCSHB-01	25	1"	76 .00
FCRMHW00287	FCSHB-02	32	1 1/4"	92 .00
FCRMHW00288	FCSHB-03	38	1 1/2"	92 .00
FCRMHW00289	FCSHB-04	45	1 3/4"	126.00
FCRMHW00290	FCSHB-04	50	2"	126.00



Nylon Soft Blow Hammers


- **Materials :** Metal head, M/S Silver Zinc plating, tips nylon tempered impact resistant, handel, seasoned wood with wedge and oval Anti-Swivel design. (Class Timber ISS 620-1965).

All tips are single moulded without any metal inserts so as to soften the blow and prevent any damage in case of misdirected blows.

Specialy designed seating between tips and metal head to prevent chipping and cracking from misdirected blows spreading the impact evenly across wide surface area.

Used, due to the easily interchangeable heads, as a multi purpose striking tool in most assembly applications including engineering, furniture, assembly shop, partitioning, double glazing, injection moulding dies etc.

- **Color :** Natural
- **Certification :** CE, RoHs, Reach

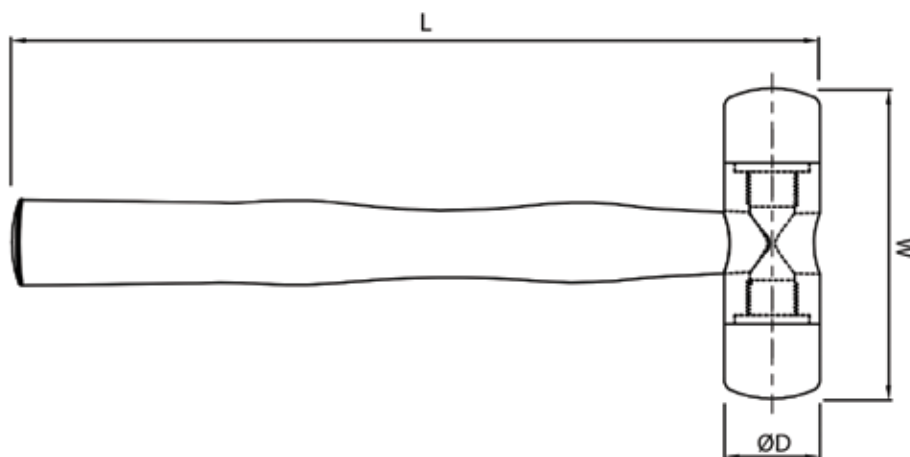

Part Code	Part Description	Size ØD		W	L	MRP Per Pcs Complete Hammer
		mm	Inch			
FCFGNBH0001	FCSHB-01	25	1"	92.5	270	310 .00
FCFGNBH0002	FCSHB-02	32	1 1/4"	106	270	399 .00
FCFGNBH0003	FCSHB-03	38	1 1/2"	120	300	494 .00
FCFGNBH0004	FCSHB-04	45	1 3/4"	121	300	622 .00
FCFGNBH0005	FCSHB-05	50	2"	129	350	720 .00