


Spiral Cable Glands

- **Raw material** : Body - polyamide 6
- **Sealing** : Anti slip thermo plastic rubber (TPR)
- **Temperature** : Static -10°C to +80°C, Dynamic -30°C to +120°C,
- **Ingress protection** : IP 67 without oring & IP 68 with oring
- **Colors** : Silver grey RAL 7001, light grey RAL 7035 & black RAL 9005
- **Certification/ Standards** : RoHS/REACH Compliant / CE / DIN 46230 / EN62444-2013

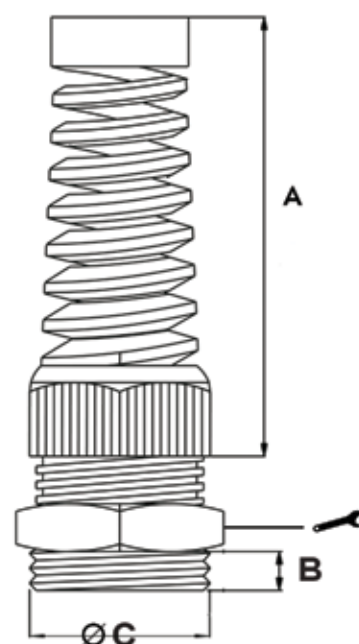

Part Code	Part Description	Cable Range			Dimensions			Packing		MRP Per Pcs
		Min	Max		A	B	ØC	Inner Cartoon	Master Cartoon	
		mm	mm	mm	mm	mm	mm			Rs.
FCFGNLN0029	FCSCG-7	3.5	6.5	15	47.00	9.00	12.00	100	500	50.00
FCFGNLN0032	FCSCG-9	5.5	8.0	18	56.00	10.00	15.20	100	500	57.00
FCFGNLN0002	FCSCG-11	7.0	10.0	22	67.00	10.00	18.30	100	500	63.00
FCFGNLN0005	FCSCG-13.5	8.0	12.0	24	74.00	10.00	20.00	25	500	75.00
FCFGNLN0008	FCSCG-16	10.0	14.0	27	87.00	10.00	22.50	25	500	88.00
FCFGNLN0011	FCSCG-21	14.0	18.0	33	105.00	12.00	28.50	25	500	125.00
FCFGNLN0014	FCSCG-M12X1.5	3.5	6.5	15	47.00	9.00	12.00	100	500	51.00
FCFGNLN0017	FCSCG-M16X1.5	5.5	8.0	18	56.00	10.00	16.00	100	500	55.00
FCFGNLN0020	FCSCG-M20X1.5	8.0	12.0	24	74.00	10.00	20.00	25	500	77.00
FCFGNLN0023	FCSCG-M-25X1.5	10.0	14.0	27	87.00	10.00	25.00	25	500	92.00
FCFGNLN0026	FCSCG-M32x1.5	14.0	18.0	37	105.00	10.00	32.00	25	500	130.00